



LIGHTING COLLECTION

BRAND POSITIONING CATALOG

A considered approach to light technology and space.

WE DESIGN. WE INTEGRATE. WE ILLUMINATE.

SUNIVIK is positioned as a lighting-led design and integration brand for contemporary spaces – bringing together illumination, intelligent technology and thoughtful spatial design.

● LIGHTING SOLUTIONS

Layered, architectural and functional lighting designed to shape the character of every space.

● HOME AUTOMATION

Connected controls and intelligent systems that make modern environments simpler and more responsive.

● SECURITY SYSTEMS

Integrated technology that supports comfort, control and confidence.

● ARCHITECTURE & INTERIOR DESIGN

A spatial approach that connects materials, proportions, technology and light.

LIGHT IS NOT AN ADD-ON. IT IS PART OF THE ARCHITECTURE.

LIGHTING WITH INTENT.

SUNIVIK brings a clear point of view to the way people experience built environments. Our focus begins with light — not simply as illumination, but as a design language that defines mood, depth, rhythm and function.

From architectural lighting to connected control, security and interior environments, we look at the complete experience. The objective is simple: make every element work together, quietly and intelligently.

DESIGNED TO BELONG.

Our approach values proportion over excess, clarity over clutter and technology that feels natural in use. The result is a considered environment where the product serves the space — and the space remains the hero.

THE COLLECTION THAT FOLLOWS IS THE PRODUCT
EXPRESSION OF THIS PHILOSOPHY.

BRAND PRINCIPLES

01 CLARITY

Every lighting choice should have a reason.

02 BALANCE

Technical performance and visual calm should coexist.

03 INTEGRATION

Lighting, controls and space should work as one system.

04 LONGEVITY

Good design should remain relevant beyond a single trend.

05 DETAIL

Finish, beam, proportion and placement define the experience.

SUNIVIK

Lighting-led solutions for contemporary spaces.



APOLLO
Pg.185-188



PEARL
Pg.189-192



ARIES
Pg.193-196



PHARO
Pg.197-198



CAPE
Pg.199-200



BYNO
Pg.269-270



FUJI
Pg.271-272



GLOBE
Pg.273-276



COMET
Pg.277-278



TENÓ
Pg.279-280



CRUST
Pg.201-202



ENZO
Pg.203-204



CRIMSON
Pg.205-206



RUBY
Pg.207-208




ORBIT
Pg.209-210



LIOR
Pg.281-286



ONYX
Pg.287-90



OLID
Pg.291-294



SURFACE ART
Pg.295-296



CONCEAL ART
Pg.297-298



POOKIE
Pg.213-214



UNNI
Pg.215-216



REN
Pg.217-218



TITAN
Pg.219-220



GATEWAY
Pg.221-222



CLASSIC
Pg.299-300



MOON
Pg.301-302



META SQ
Pg.303-306



CINDER
Pg.309-314



RAZE
Pg.315-318



REMOTE ONE
Pg.223-224



KEYPAD
Pg.225-226



LUXE EDGE
Pg.227-228



LUXE PRO
Pg.229-230



TOUCH PANEL
Pg.231-232



MOVE
Pg.319-322



CLOVER
Pg.323-328



VENUS
Pg.331-332



FINE
Pg.333-334



BRIO
Pg.335-336



LEPUS
Pg.233-234



STELLAR
Pg.235-236



RIO
Pg.237-242



MEMO
Pg.243-246



INVO
Pg.247-248



ICON
Pg.337-338



INTI
Pg.339-340



ZON
Pg.341-342



RAY 20
Pg.343-344



RAY 25
Pg.345-346



VINTAGE
Pg.249-252



GEM
Pg.253-254



BOLD
Pg.257-260



SOL
Pg.261-264



KYRO
Pg.265-268



GEO
Pg.349-350



MUD
Pg.351-352



NIO
Pg.353-354



ERDE
Pg.355-356



CLOUD
Pg.357-362



ZEN
Pg 363-368



LEX
Pg 369-370

SUNIVIK / CLIENT COMMITMENT

GUIDELINES & POLICIES

PLACING ORDERS

All orders are coordinated through SUNIVIK or an authorised project representative. An order is confirmed only after written approval of the Quotation, specifications, Quantities and delivery schedule.

CUSTOM & PROJECT-SPECIFIC PRODUCTS

Products configured, finished or manufactured to an approved project specification cannot be cancelled, returned or exchanged once procurement or production has begun.

PAYMENT & DELIVERY

Payment milestones follow the approved SUNIVIK Quotation. Dispatch and installation schedules begin after agreed payments, drawings and site-readiness requirements are completed.

INSTALLATION & PRODUCT USE

Installation must follow the stated IP rating, wattage, driver, thermal and mounting requirements. SUNIVIK recommends installation by qualified professionals and verification of site voltage and conditions before commissioning.

SUNIVIK 2-YEAR WARRANTY

SUNIVIK provides a two-year limited warranty from the In-service date against manufacturing defects in covered luminaires, LED modules and drivers under normal operating conditions.

WARRANTY EXCLUSIONS

The warranty does not cover voltage fluctuation or surge, incorrect wiring, physical damage, unauthorised alterat ion, incompatible controls, improper installation, normal finish variation or exposure beyond the stated IP rating. Claims require proof of purchase and product inspection.

SERVICE & AVAILABILITY

Product specifications, finishes and availability may evolve without notice. SUNIVIK may repair or replace an eligible component with an equivalent current specification. Project-specific commercial terms take precedence where stated in writing.

SUNIVIK / INTEGRATED LIGHTING

LIGHTING, PROVEN IN SPACE.

Fine Dining Restaurants

Banquet & Event Halls

RESIDENTIAL • HOSPITALITY • RETAIL • WORKPLACE



HIGH CRI >90



HIGH LUMENS



ANTI GLARE



ECO FRIENDLY



ENERGY SAVING
UP TO 80%



UNIVERSAL
APPLICATION



FLICKER FREE



FULHAM & OSRAM DRIVERS
AVAILABLE ON REQUEST

APPLICATIONS



Residential Living Spaces



Corporate Offices



Fine Dining Restaurants



Cafés & Coffee Shops



Retail Showrooms



Banquet & Event Halls



Auditoriums & Theatres



Educational Institutions



Sports & Fitness Facilities



Healthcare Facilities

• *Chromogenic Integrity | The 90+ Benchmark*

The standard of true colour

Lighting should reveal, not distort. That's why every product we manufacture is built with a default Color Rendering Index (CRI) Above 90. At the core of our lighting philosophy is a commitment to visual truth. Colour is not just seen, it is felt.

While the industry standard lingers at CRI 80, we have established CRI >90 as our absolute minimum across all product lines. By prioritizing high RA values, our luminaires ensure that textures are rich, skin tones are natural, and architectural materials appear exactly as the designer intended. Experience a spectrum without compromise.



• *Visual Equilibrium | Advanced Optical Shielding*

Visual comfort is engineered, not accidental

Our lighting systems integrate advanced anti-glare optics, precisely controlling beam angles and light diffusion to eliminate harsh reflections and eye fatigue. We use optically refined lenses from highly reputed brands such as Darkoo, Tehao.

Through refined Lens geometry and deep-recessed designs, we ensure a soft, uniform illumination experience.



• *Coherent Beam Architecture (COB)*

Uniformity in Every Facet, our default use of the established Chip-On-Board (COB) technology eliminates the "multi-shadow" effect common in inferior LEDs. By utilizing a single high-density light-emitting surface, all our fixtures produce a clean, punchy beam with a soft-graded edge. Whether used for narrow-spot accenting or wide-wash illumination, our COB engines deliver a dimensionally rich light that enhances the three-dimensionality of all interiors.



• *The Light Emitting Diode | Tier-1 Global Technology*

LEDVANCE (OSRAM): A Commitment to Excellence



A luminaire is only as enduring as its engine.

We are proud to announce our deliberate decision to select LEDVANCE by OSRAM as our primary LED Chip platform and reference standard for superior quality and performance.

This benchmark ensures our luminaires are powered by high-reliability, industrial-grade LED, engineered for longevity, thermal stability, and consistent lumen output. LEDVANCE's history in German engineering translates into exceptional durability and performance consistency across all applications.

CREE PRO (XMB SERIES): Ultra-Precise Luxury Led Chips



For our flagship architectural range, we utilize the CREE PRO XMB series. These are ultra-precise, high-density chips engineered for Luxury Lighting Applications. They offer industry-leading lumen maintenance and tight-binning consistency, ensuring that the light color remains identical across 1 or 1,000 fixtures.

industry-leading lumen maintenance and tight-binning consistency, ensuring that the light color remains identical across 1 or 1,000 fixtures.

Tyanshine: High-Power CCT Tunable Technology



To power our Human-Centric Lighting (HCL) systems, we utilize Tyanshine specialized COB modules. These chips represent the pinnacle of CCT tuning, allowing for seamless transitions from 2700K (Warm Sunset) to 6500K (Daylight) without "banding" or color shifts, maintaining a perfect Planckian curve throughout the dimming cycle.

• *THE MIND BEHIND THE LIGHT*

We prioritize performance, reliability, and compatibility in every product we offer. That's why we use only the best-in-class, universally recognised branded Drivers that are carefully selected to deliver optimal results. Each driver is precisely matched with its corresponding LED light source, ensuring that specifications such as voltage, current, and efficiency are perfectly aligned. This tailored integration enhances the overall performance and lifespan of the LED chip, guaranteeing consistent illumination, energy efficiency, and dependable operation across all applications.



with intention, with passion, with light

ASTRA



ASTRA 7W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 480 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ASTRA



ASTRA 12W

APPLICATION

- IP Rating**
IP20
- Recommended Use**
Indoor Use
- Installation**
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source** _____ Ledvance | Cree Pro | Tyanshine
- CCT** _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI** _____ >90
- Lens** _____ 36° / 24° / 15°
- Luminous Flux** _____ 960 Lm
- Efficiency** _____ 80 Lm/W
- Material** _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

- White | Black
- ☐ ☒



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ASTRA



ASTRA 15W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1200 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ASTRA



ASTRA 20W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1600 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	500mA
Dimmable	TRIAC	36V	500mA
Smart	Sigmesh (Bluetooth Based)	36V	500mA
	Zigbee (Wifi Based)	36V	500mA
Dali	Dt 6	36V	500mA
	Dt 8	36V	500mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ASTRA



ASTRA 30W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 2400 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	700mA
Dimmable	TRIAC	36V	700mA
Smart	Sigmesh (Bluetooth Based)	36V	700mA
	Zigbee (Wifi Based)	36V	700mA
Dali	Dt 6	36V	700mA
	Dt 8	36V	700mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ASTRA



ASTRA 45W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24°

Luminous Flux _____ 3600 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	1200mA
Dimmable	TRIAC	36V	1200mA
Smart	Sigmesh (Bluetooth Based)	36V	1200mA
	Zigbee (Wifi Based)	36V	1200mA
Dali	Dt 6	36V	1200mA
	Dt 8	36V	1200mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

LUMA



LUMA 7W

APPLICATION

- IP Rating**
IP20
- Recommended Use**
Indoor Use
- Installation**
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source** _____ Ledvance | Cree Pro | Tyanshine
- CCT** _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI** _____ >90
- Lens** _____ 36° / 24° / 15°
- Luminous Flux** _____ 560 Lm
- Efficiency** _____ 80 Lm/W
- Material** _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

- White | Black
- ☐ ☒



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

LUMA



LUMA 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

LUMA



LUMA 15W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1200 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

LUMA



LUMA 20W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1600 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	500mA
Dimmable	TRIAC	36V	500mA
Smart	Sigmesh (Bluetooth Based)	36V	500mA
	Zigbee (Wifi Based)	36V	500mA
Dali	Dt 6	36V	500mA
	Dt 8	36V	500mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

COSMO



COSMO 10W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 800 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White | Gun Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

COSMO



COSMO 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White | Gun Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

COSMO



COSMO 15W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1500 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

White | Gun Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

JONO



JONO 7W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 560 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



JONO 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



JONO 15W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24° / 15°
- Luminous Flux _____ 1200 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- White



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



JONO 18W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1440 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	450mA
Dimmable	TRIAC	36V	450mA
Smart	Sigmesh (Bluetooth Based)	36V	450mA
	Zigbee (Wifi Based)	36V	450mA
Dali	Dt 6	36V	450mA
	Dt 8	36V	450mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Lights with elegance, class & modesty

EON



EON 5W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 400 Lm

Efficiency _____ 80 Lm/W


Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	120mA
Dimmable	TRIAC	36V	120mA
Smart	Sigmesh (Bluetooth Based)	36V	120mA
	Zigbee (Wifi Based)	36V	120mA
Dali	Dt 6	36V	120mA
	Dt 8	36V	150mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

White | Black

EON



EON 10W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine
CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
CRI _____ >90
Lens _____ 36° / 24° / 15°
Luminous Flux _____ 720 Lm
Efficiency _____ 80 Lm/W
Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

White | Black
 

EON



EON 15W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1200 Lm

Efficiency _____ 80 Lm/W


Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

White | Black

ELITE



ELITE 5W

APPLICATION

- IP Rating**
IP20
- Recommended Use**
Indoor Use
- Installation**
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source** _____ Ledvance | Cree Pro | Tyanshine
- CCT** _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI** _____ >90
- Lens** _____ 36° / 24°/15°
- Luminous Flux** _____ 450 Lm
- Efficiency** _____ 90 Lm/W
- Material** _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	120mA
Dimmable	TRIAC	36V	120mA
Smart	Sigmesh (Bluetooth Based)	36V	120mA
	Zigbee (Wifi Based)	36V	120mA
Dali	Dt 6	36V	120mA
	Dt 8	36V	120mA

Finish

- White | Black
-

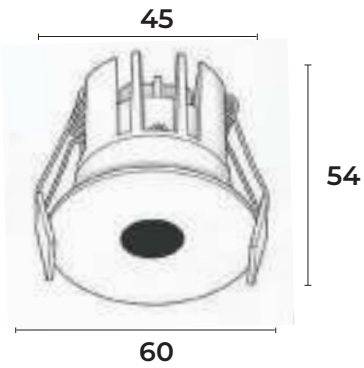

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ELITE TL



ELITE 5W TL

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source _____ Ledvance | Cree Pro | Tyanshine
CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
CRI _____ >90
Lens _____ 36° / 24°/15°
Luminous Flux _____ 450 Lm
Efficiency _____ 90 Lm/W
Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	120mA
Dimmable	TRIAC	36V	120mA
Smart	Sigmesh (Bluetooth Based)	36V	120mA
	Zigbee (Wifi Based)	36V	120mA
Dali	Dt 6	36V	120mA
	Dt 8	36V	120mA

Finish

White + Black

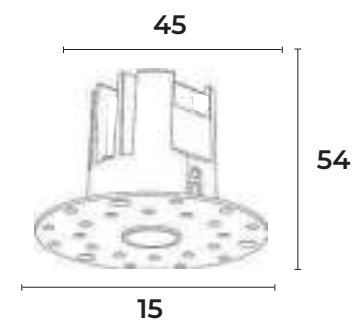

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



ELITE 10W

APPLICATION

- IP Rating**
IP20
- Recommended Use**
Indoor Use
- Installation**
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source** _____ Ledvance | Cree Pro | Tyanshine
- CCT** _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI** _____ >90
- Lens** _____ 36° / 24°/15°
- Luminous Flux** _____ 750 Lm
- Efficiency** _____ 75 Lm/W
- Material** _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

- White | Black
- ☐ ☒

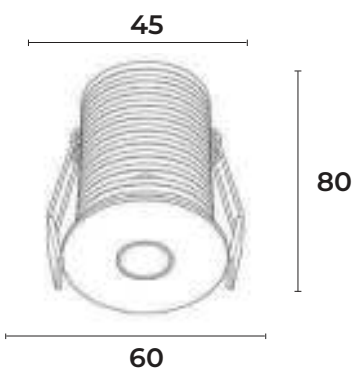

DIMMING & TUNING TECHNOLOGY

- RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ELITE TL



ELITE 10W TL

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24°/15°
- Luminous Flux _____ 750 Lm
- Efficiency _____ 75 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

- White + Black
- ☐ ☒

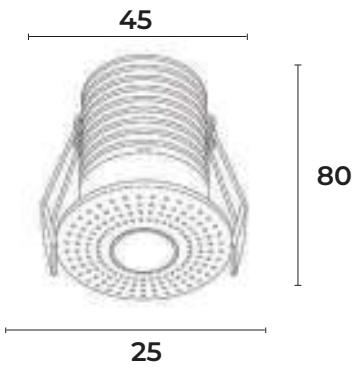

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ELITE



ELITE 15W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24°/15°
- Luminous Flux _____ 1125 Lm
- Efficiency _____ 75 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- White | Black
- ☐ ☒

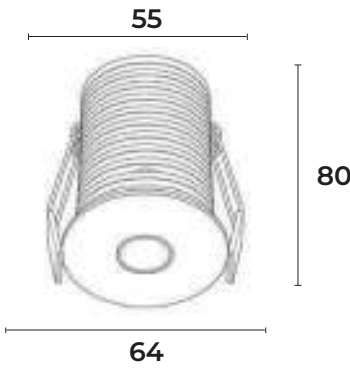

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Light that transforms spaces into experiences

SATURN



SATURN 5W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24°/15°
- Luminous Flux _____ 450 Lm
- Efficiency _____ 90 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	120mA
Dimmable	TRIAC	36V	120mA
Smart	Sigmesh (Bluetooth Based)	36V	120mA
	Zigbee (Wifi Based)	36V	120mA
Dali	Dt 6	36V	120mA
	Dt 8	36V	120mA

Finish

- White | Black
- ☐ ☒

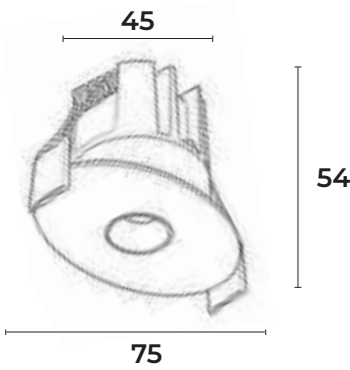

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

SATURN



SATURN 10W

APPLICATION

- IP Rating**
IP20
- Recommended Use**
Indoor Use
- Installation**
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source** _____ Ledvance | Cree Pro | Tyanshine
- CCT** _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI** _____ >90
- Lens** _____ 36° / 24°/15°
- Luminous Flux** _____ 750 Lm
- Efficiency** _____ 75 Lm/W
- Material** _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

- White | Black
- ☐ ☒

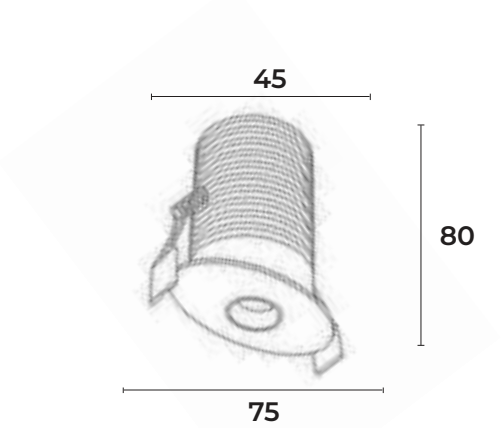

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Illumination that inspires....

ALBA



ALBA 10W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source _____ Ledvance | Cree Pro | Tyanshine
CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
CRI _____ >90
Lens _____ 36° / 24°/15°
Luminous Flux _____ 800 Lm
Efficiency _____ 80 Lm/W
Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White | Black
 

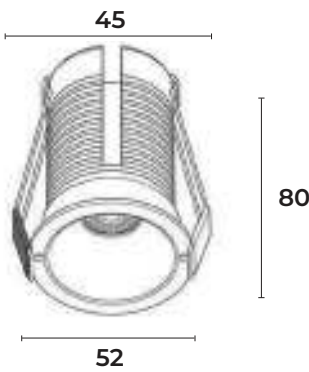

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ALBA



ALBA 15W

APPLICATION

- IP Rating**
IP20
- Recommended Use**
Indoor Use
- Installation**
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source** _____ Ledvance | Cree Pro | Tyanshine
- CCT** _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI** _____ >90
- Lens** _____ 36° / 24°/15°
- Luminous Flux** _____ 1200 Lm
- Efficiency** _____ 80 Lm/W
- Material** _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- White | Black
-

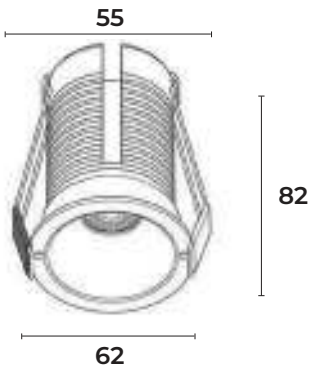

DIMMING & TUNING TECHNOLOGY

- DALI 2
- RF 2.4G + BLE
- TRIAC/PHASE CUT
- ZIGBEE

NEBULA



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine
CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
CRI _____ >90
Lens _____ 36° / 24° / 15°
Luminous Flux _____ 720 Lm
Efficiency _____ 80 Lm/W
Material _____ Aluminium Die-Cast

NEBULA 10W




DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

DIMMING & TUNING TECHNOLOGY

RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

White | Black

NEBULA



NEBULA 12W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source _____ Ledvance | Cree Pro | Tyanshine
CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
CRI _____ >90
Lens _____ 36° / 24° / 15°
Luminous Flux _____ 960 Lm
Efficiency _____ 80 Lm/W
Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

White | Black
 

NEBULA



NEBULA 15W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source _____ Ledvance | Cree Pro | Tyanshine
CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
CRI _____ >90
Lens _____ 36° / 24° / 15°
Luminous Flux _____ 1200 Lm
Efficiency _____ 80 Lm/W
Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

White | Black
 

HYDRA FRONT OPENABLE SERIES



HYDRA



FRONT OPENABLE

HYDRA 12W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24° / 15°
- Luminous Flux _____ 960 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

- White + Gun Black | White + White | White + Black
- ● ○ ○ ○ ●

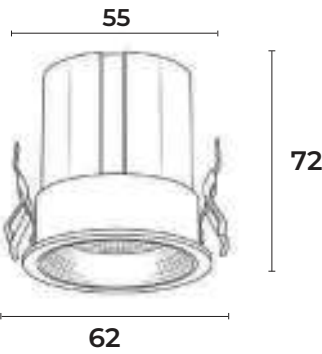

HYDRA



FRONT OPENABLE

HYDRA 12W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24° / 15°
- Luminous Flux _____ 960 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

- Black + Gun Black | Black + White | Black + Black

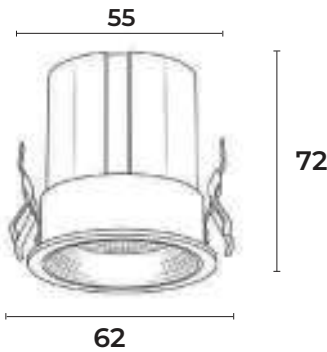

DIMMING & TUNING TECHNOLOGY

- DALI 2 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

HYDRA TL



FRONT OPENABLE

HYDRA 12W TL

APPLICATION

- IP Rating**
IP20
- Recommended Use**
Indoor Use
- Installation**
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source** _____ Ledvance | Cree Pro | Tyanshine
- CCT** _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI** _____ >90
- Lens** _____ 36° / 24° / 15°
- Luminous Flux** _____ 960 Lm
- Efficiency** _____ 80 Lm/W
- Material** _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

Gun Black | White | Black

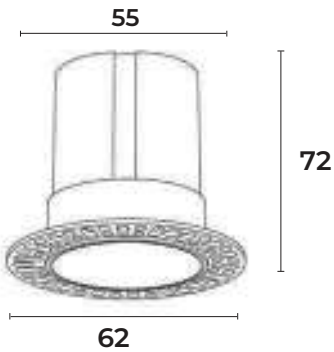

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

HYDRA



FRONT OPENABLE

HYDRA 15W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1200 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

White + Gun Black | White + White | White + Black

○ ● ○ ○ ○ ●

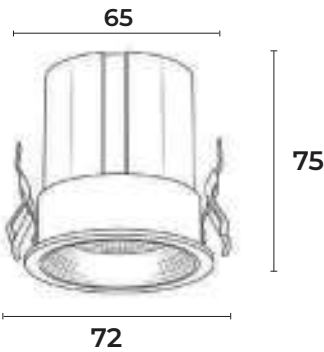

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

HYDRA



FRONT OPENABLE

HYDRA 15W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24° / 15°
- Luminous Flux _____ 1200 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- Black + Gun Black | Black + White | Black + Black

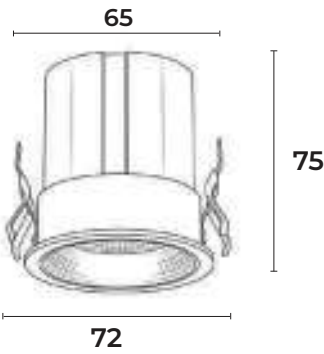

DIMMING & TUNING TECHNOLOGY

- DALI 2 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

HYDRA TL



FRONT OPENABLE

HYDRA 15W TL

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1200 Lm

Efficiency _____ 80 Lm/W


Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

Gun Black | White | Black

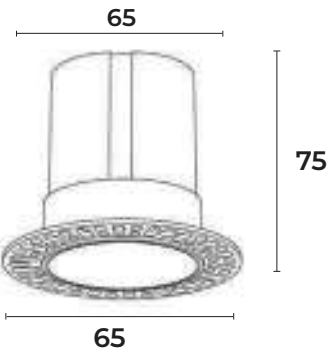

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

HYDRA



FRONT OPENABLE

HYDRA 20W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1600 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	500mA
Dimmable	TRIAC	36V	500mA
Smart	Sigmesh (Bluetooth Based)	36V	500mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	500mA
	Dt 8	36V	500mA

Finish

White + Gun Black | White + White | White + Black

○ ● ○ ○ ○ ●

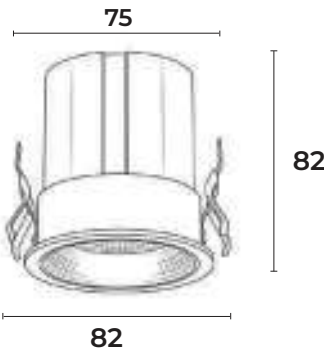

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

HYDRA



FRONT OPENABLE

HYDRA 20W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1600 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	500mA
Dimmable	TRIAC	36V	500mA
Smart	Sigmesh (Bluetooth Based)	36V	500mA
	Zigbee (Wifi Based)	36V	500mA
Dali	Dt 6	36V	500mA
	Dt 8	36V	500mA

Finish

Black + Gun Black | Black + White | Black + Black

● ● ● ○ ● ●

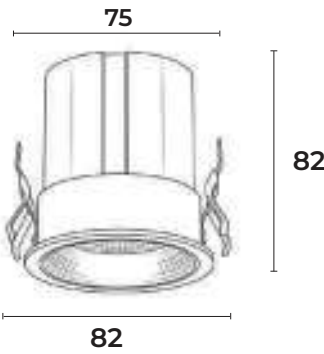

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

HYDRA TL



FRONT OPENABLE

HYDRA 20W TL

APPLICATION

- IP Rating**
IP20
- Recommended Use**
Indoor Use
- Installation**
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source** _____ Ledvance | Cree Pro | Tyanshine
- CCT** _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI** _____ >90
- Lens** _____ 36° / 24° / 15°
- Luminous Flux** _____ 1600 Lm
- Efficiency** _____ 80 Lm/W
- Material** _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	500mA
Dimmable	TRIAC	36V	500mA
Smart	Sigmesh (Bluetooth Based)	36V	500mA
	Zigbee (Wifi Based)	36V	500mA
Dali	Dt 6	36V	500mA
	Dt 8	36V	500mA

Finish

Gun Black | White | Black

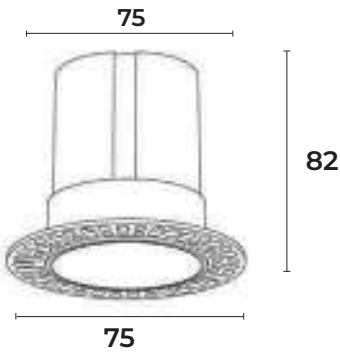

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Light defines the soul of a room

OPAL



OPAL 15W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24° / 15°
- Luminous Flux _____ 1200 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- White | Black
- ☐ ☒

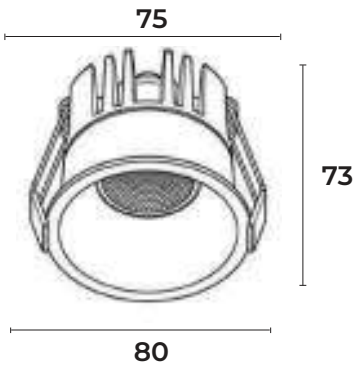

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

REGAL



REGAL 10W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 800 Lm

Efficiency _____ 80 Lm/W


Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White + Gun Black

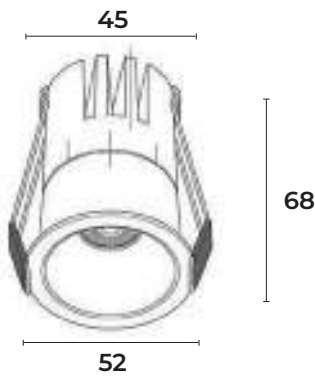

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

REGAL



REGAL 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W


Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	280mA
Smart	Sigmesh (Bluetooth Based)	36V	280mA
	Zigbee (Wifi Based)	36V	280mA
Dali	Dt 6	36V	280mA
	Dt 8	36V	280mA

Finish

White + Gun Black

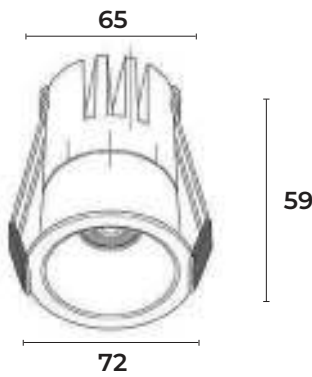

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

REGAL



REGAL 15W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 1200 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

White + Gun Black

○ ●

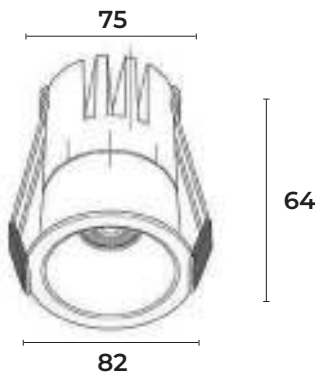

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

NOVA



NOVA 12W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24° / 15°
- Luminous Flux _____ 960 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

- White
- ☐

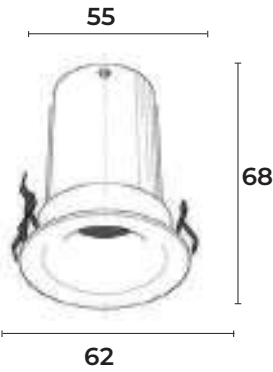

DIMMING & TUNING TECHNOLOGY

-  RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



NOVA 15W

APPLICATION

- IP Rating**
IP20
- Recommended Use**
Indoor Use
- Installation**
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source** _____ Ledvance | Cree Pro | Tyanshine
- CCT** _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI** _____ >90
- Lens** _____ 36° / 24° / 15°
- Luminous Flux** _____ 1200 Lm
- Efficiency** _____ 80 Lm/W
- Material** _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	300mA

Finish

- White

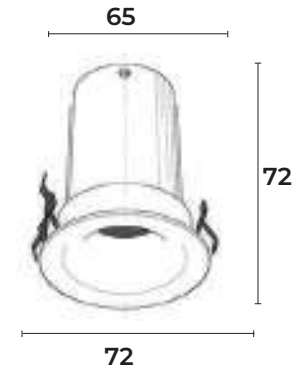

DIMMING & TUNING TECHNOLOGY

-  RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

NOVA



NOVA 20W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24° / 15°
- Luminous Flux _____ 1600 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	500mA
Dimmable	TRIAC	36V	500mA
Smart	Sigmesh (Bluetooth Based)	36V	500mA
	Zigbee (Wifi Based)	36V	500mA
Dali	Dt 6	36V	500mA
	Dt 8	36V	500mA

Finish

- White

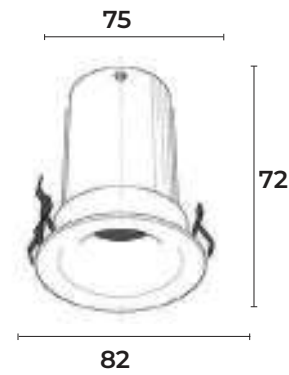

DIMMING & TUNING TECHNOLOGY

-  RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

HELIX



HELIX 7W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 560 Lm

Efficiency _____ 80 Lm/W


Material _____ Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

White + Gun Black

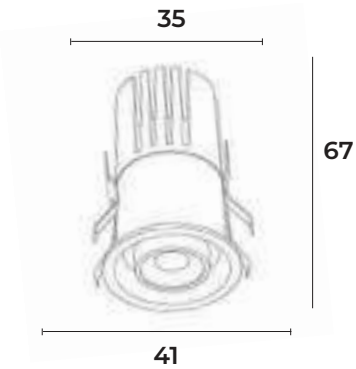

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

HELIX



HELIX 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W


Material _____ Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White + Gun Black



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



FEATURES



50,000
BURNING HOURS



HIGH CRI >90



HIGH LUMENS



2 YEARS
WARRANTY*



ANTI GLARE



ECO FRIENDLY



FLAWLESS
COLOR, FINISHING & FEEL



ENERGY SAVING
UP TO 80%



UNIVERSAL
APPLICATION



2700K & 5000K LED
AVAILABLE ON REQUEST



FLICKER FREE



FULHAM & OSRAM DRIVERS
AVAILABLE ON REQUEST



NEXA 7W

APPLICATION

- IP Rating

IP20
- Recommended Use

Indoor Use
- Installation

Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

- LED Light Source

Ledvance | Cree Pro | Tyanshine
- CCT

3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI

>90
- Lens

36° / 24° / 15°
- Luminous Flux

560 Lm
- Efficiency

80 Lm/W
- Material


Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

- Brass Gold
-



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



NEXA 12W

APPLICATION

- IP Rating**
IP20
- Recommended Use**
Indoor Use
- Installation**
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source** _____ Ledvance | Cree Pro | Tyanshine
- CCT** _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI** _____ >90
- Lens** _____ 36° / 24° / 15°
- Luminous Flux** _____ 960 Lm
- Efficiency** _____ 80 Lm/W
- Material** _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

- Brass Gold
-



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



NEXA 15W

APPLICATION

- IP Rating

IP20
- Recommended Use

Indoor Use
- Installation

Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

- LED Light Source

Ledvance | Cree Pro | Tyanshine
- CCT

3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI

>90
- Lens

36° / 24° / 15°
- Luminous Flux

1200 Lm
- Efficiency

80 Lm/W
- Material


Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- Brass Gold
-



DIMMING & TUNING TECHNOLOGY

- DALI 2
- RF 2.4G + BLE
- TRIAC/PHASE CUT
- ZIGBEE

MAPLE



3 STEP ADJUSTABLE

MAPLE 10W (ARC)

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 800 Lm

Efficiency _____ 80 Lm/W


Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White + White White + Gun Black White + Rose Gold
○ ○ ○ ● ○ ●
Black + Rose Gold Black + White Black + Gun Black
● ● ● ○ ● ●



DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

MAPLE TL



3 STEP ADJUSTABLE

MAPLE 10W (ARC) TL

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 800 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White | Gun Black | Rose Gold

○ ● ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

HAZLE



3 STEP ADJUSTABLE

HAZLE 10W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 800 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based) Zigbee (Wifi Based)	36V	250mA
		36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White + White


Black + Rose Gold

White + Gun Black

Black + White

White + Rose Gold

Black + Gun Black

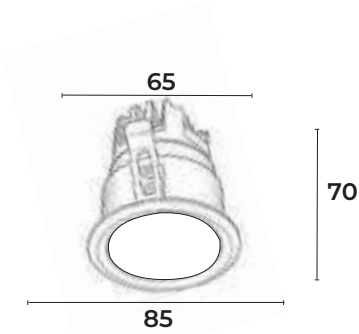

DIMMING & TUNING TECHNOLOGY

RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

HAZLE TL



3 STEP ADJUSTABLE

HAZLE 10W TL

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 800 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White | Gun Black | Rose Gold

○ ● ●

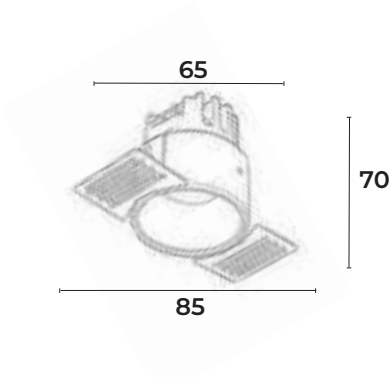

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



In the right light, everything becomes art

COMFORT



COMFORT 7W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 60°

Luminous Flux _____ 560 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

COMFORT



COMFORT 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 60°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

COMFORT



COMFORT 18W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 60°

Luminous Flux _____ 1440 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	450mA
Dimmable	TRIAC	36V	450mA
Smart	Sigmesh (Bluetooth Based)	36V	450mA
	Zigbee (Wifi Based)	36V	450mA
Dali	Dt 6	36V	450mA
	Dt 8	36V	450mA

Finish

White

○

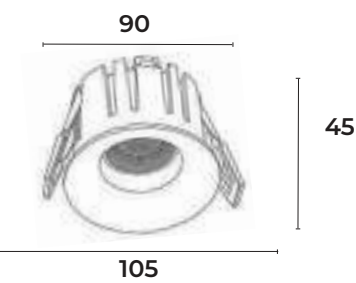

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

MATRIX



MATRIX 15W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 1125 Lm

Efficiency _____ 75 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA

Finish

White + Gun Black

☐ ☒

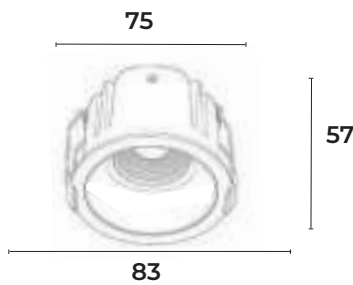

TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

DURA



DURA 7W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 525 Lm

Efficiency _____ 75L m/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

DURA



DURA 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 900 Lm

Efficiency _____ 75L m/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White

○

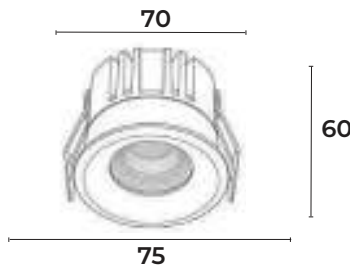

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



BENZ 15W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 60°

Luminous Flux _____ 1225 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

White + Chrome

☐ ☐



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

PINOC



PINOC 15W



APPLICATION


- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

- LED Light Source BRIDGELUX
- CCT 3000K | 4000K
- CRI >90
- Lens 36° / 24°
- Luminous Flux 1125Lm
- Efficiency 75Lm/W
- Material Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA



- Finish
- White | Black
- ☐ ☒

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

CHAN



CHAN 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	280mA
Smart	Sigmesh (Bluetooth Based)	36V	280mA
	Zigbee (Wifi Based)	36V	280mA
Dali	Dt 6	36V	280mA
	Dt 8	36V	280mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



LEO 15W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36°
- Luminous Flux _____ 1200 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- White



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



LEO 18W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36°
- Luminous Flux _____ 1440 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	450mA
Dimmable	TRIAC	36V	450mA
Smart	Sigmesh (Bluetooth Based)	36V	450mA
	Zigbee (Wifi Based)	36V	450mA
Dali	Dt 6	36V	450mA
	Dt 8	36V	450mA

Finish

- White
- ☐



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36°
- Luminous Flux _____ 1600 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	500mA
Dimmable	TRIAC	36V	500mA
Smart	Sigmesh (Bluetooth Based)	36V	500mA
	Zigbee (Wifi Based)	36V	500mA
Dali	Dt 6	36V	500mA
	Dt 8	36V	500mA

Finish

- White



DIMMING & TUNING TECHNOLOGY

-  RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ROVER



TILTABLE

ROVER 7W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 525 Lm

Efficiency _____ 75 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ROVER



TILTABLE

ROVER 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 900 Lm

Efficiency _____ 75 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



WINK



WINK 10W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 60° x 30° (Asymetric Beam)

Luminous Flux _____ 800 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

CHARM



CHARM 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 24°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White + Gun Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

CHARM



CHARM 15W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 24°

Luminous Flux _____ 1200 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

White + Gun Black

○ ●

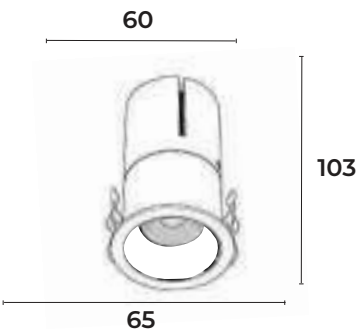

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

CHIC



CHIC 7W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 24°

Luminous Flux _____ 525 Lm

Efficiency _____ 75 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

White | Black

○ ●

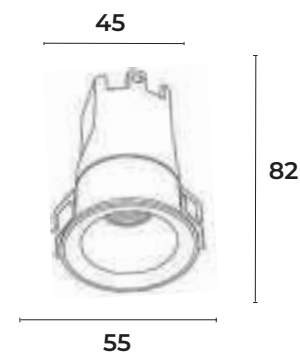

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

CHIC



CHIC 10W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 24°

Luminous Flux _____ 750 Lm

Efficiency _____ 75 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



DAWN



TILTABLE

DAWN 7W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 560 Lm

Efficiency _____ 80 Lm/W

Material _____ PVC + Aluminium

DRIVE SYSTEM


	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

White + Gun Black



Black + Gun Black

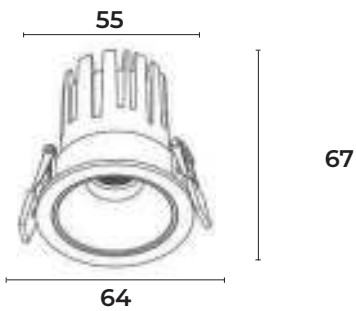

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

DAWN TL



TILTABLE

DAWN 7W TL

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 560 Lm

Efficiency _____ 80 Lm/W

Material _____ PVC + Aluminium


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

Gun Black

●

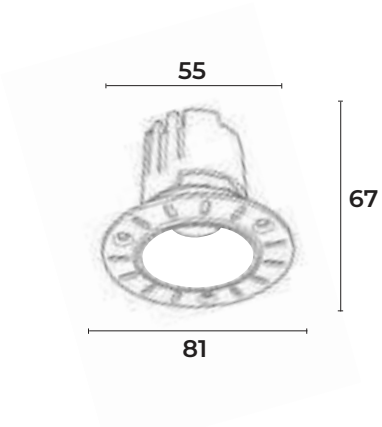

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

DAWN



TILTABLE

DAWN 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ PVC + Aluminium

DRIVE SYSTEM


	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White + Gun Black



Black + Gun Black



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

DAWN TL



TILTABLE

DAWN 12W TL

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ PVC + Aluminium


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

Gun Black

●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



VESPER

VESPER 12W



TILTABLE

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source	Ledvance Cree Pro Tyanshine
CCT	3000K 4000K 6000K 2700K - 6500K Tunable
CRI	>90
Lens	36°
Luminous Flux	960 Lm
Efficiency	80 Lm/W
Material	PVC + Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

- White + Gun Black
- Black + Gun Black

VESPER



TILTABLE

VESPER 12W TL

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W


Material _____ PVC + Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

Gun Black

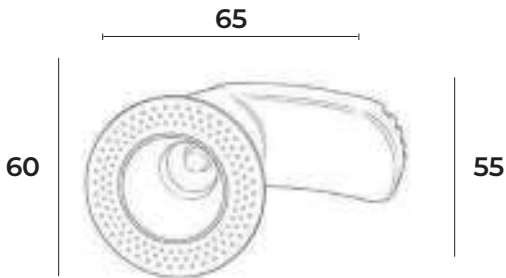

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

APOLLO



TILTABLE

APOLLO 9W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 720 Lm

Efficiency _____ 80 Lm/W


Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Regular	Eaglerise	36V	200mA
Smart	Sigmesh (Bluetooth Based) Zigbee (Wifi Based)	36V	200mA
		36V	200mA
Dali	Dt 6	36V	200mA
	Dt 8	36V	200mA
Dimmable	Phasecut	36V	200mA

Finish

White + Black

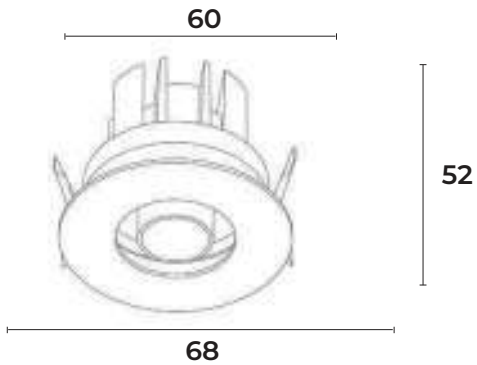


DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

APOLLO TL

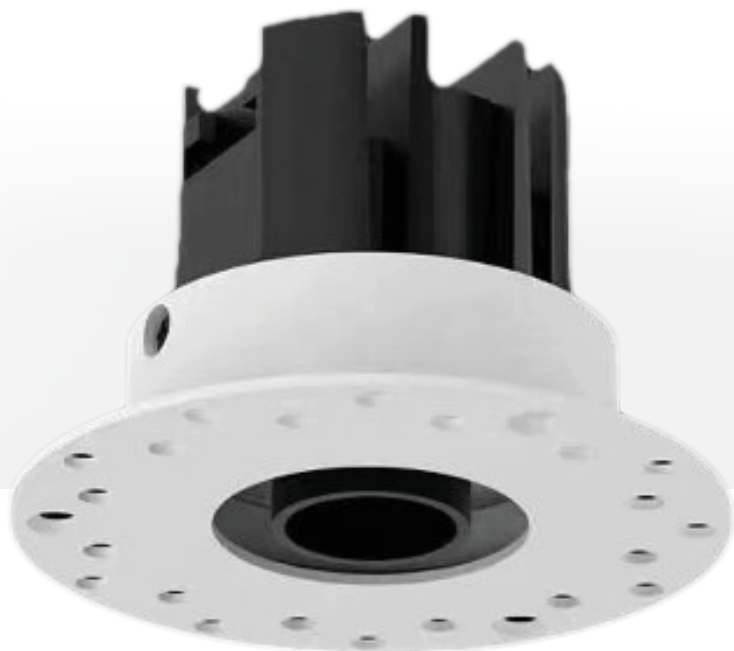

TILTABLE

APOLLO 9W TL

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 720 Lm

Efficiency _____ 80 Lm/W


Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Regular	Eaglerise	36V	200mA
Smart	Sigmesh (Bluetooth Based) Zigbee (Wifi Based)	36V	200mA
		36V	200mA
Dali	Dt 6	36V	200mA
	Dt 8	36V	200mA
Dimmable	Phasecut	36V	200mA

Finish

White + Black

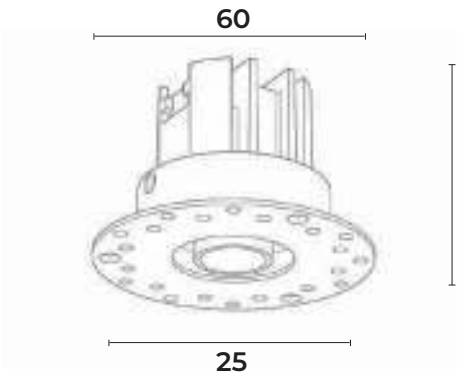

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

PEARL



TILTABLE

PEARL 5W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Bridgelux

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24°

Luminous Flux _____ 400 Lm

Efficiency _____ 80 Lm/W


Material _____ Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	120mA
Dimmable	TRIAC	36V	120mA
Smart	Sigmesh (Bluetooth Based)	36V	120mA
	Zigbee (Wifi Based)	36V	120mA
Dali	Dt 6	36V	120mA
	Dt 8	36V	120mA

Finish

White + Black

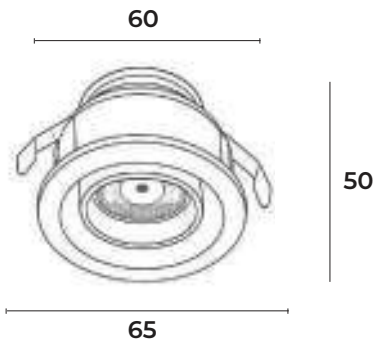

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

PEARL



TILTABLE

PEARL 7W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Bridgelux

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24°

Luminous Flux _____ 560 Lm

Efficiency _____ 80 Lm/W


Material _____ PVC

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

White + Black

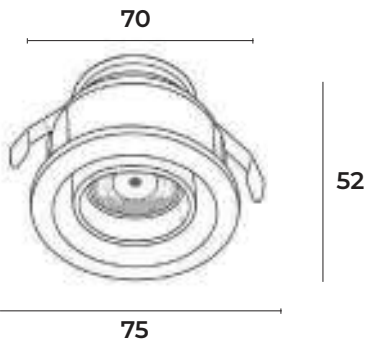

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ARIES



ARIES 10W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500k Tunable
- CRI _____ >90
- Lens _____ 36° / 24°/15°
- Luminous Flux _____ 750 Lm
- Efficiency _____ 75 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White + Gun Black | Black + Gun Black

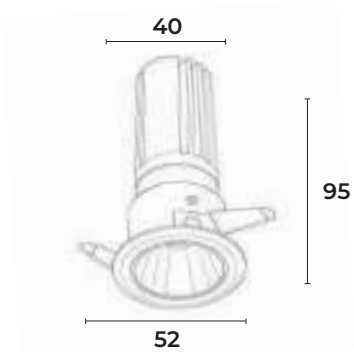

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ARIES TL



ARIES 10W TL

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500k Tunable
- CRI _____ >90
- Lens _____ 36° / 24°/15°
- Luminous Flux _____ 750 Lm
- Efficiency _____ 75 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

Gun Black



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

PHARO



PHARO 10W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24° / 15°
- Luminous Flux _____ 800 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

- White | Black
- ☐ ☒



DIMMING & TUNING TECHNOLOGY

- RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

CAPE



TILTABLE

CAPE 10W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 730 Lm

Efficiency _____ 73 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White | Black

○ ●

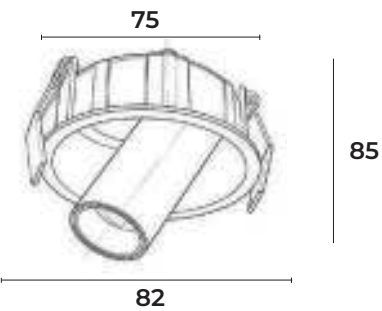

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

CRUST



ROTATABLE

CRUST 9W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 24°

Luminous Flux _____ 720 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	200mA
Dimmable	TRIAC	36V	200mA
Smart	Sigmesh (Bluetooth Based)	36V	200mA
	Zigbee (Wifi Based)	36V	200mA
Dali	Dt 6	36V	200mA
	Dt 8	36V	200mA

Finish

White


○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

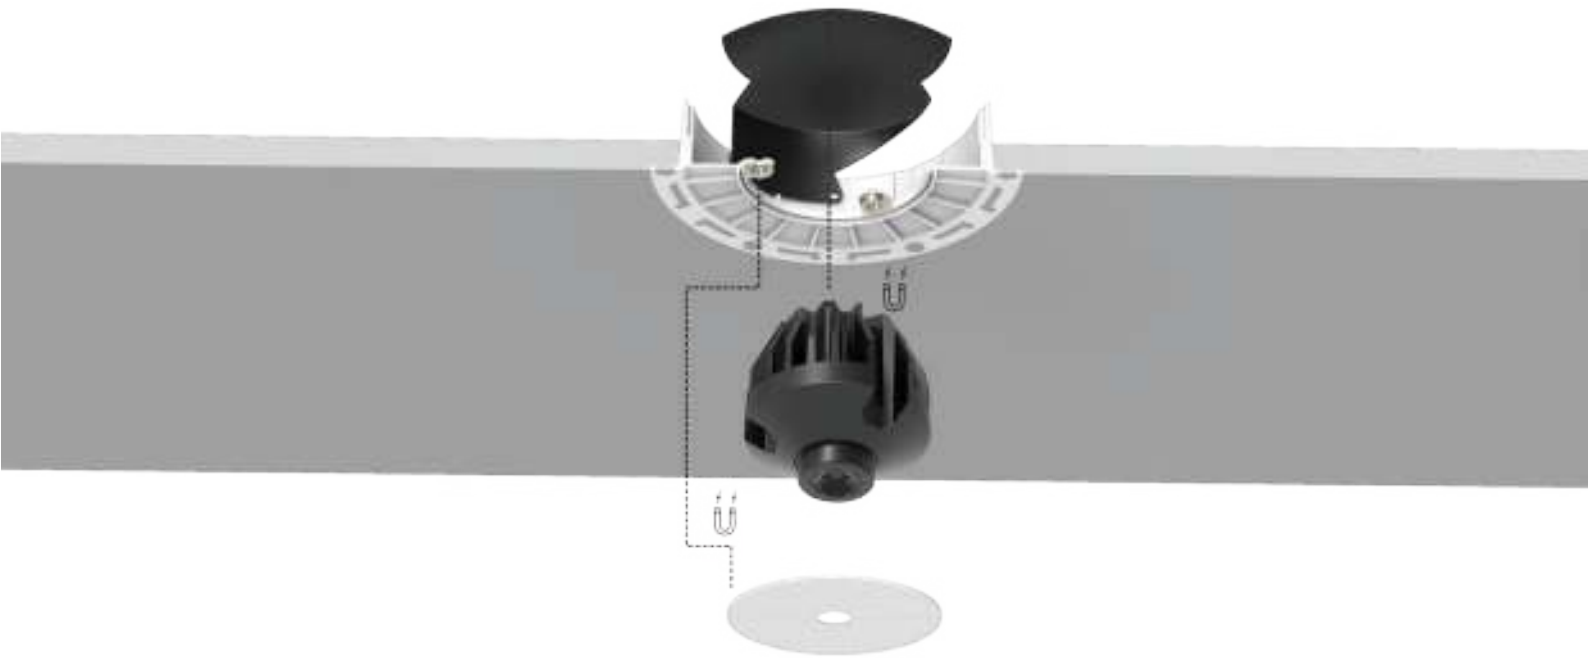

ENZO 10W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 45°

Luminous Flux _____ 750 Lm

Efficiency _____ 75 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

CRIMSON



CRIMSON 9W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K | 4000K | 6000K

CRI _____ >90

Lens _____ 45°

Luminous Flux _____ 630 Lm

Efficiency _____ 70 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	36V	220mA

Finish

White + Chrome

☐ ☒



RUBY



RUBY 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 45°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White + Chrome

☐ ☒



DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ORBIT



TILTABLE

ORBIT 12W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K to 6500K Tunable
- CRI _____ >90
- Lens _____ 36°
- Luminous Flux _____ 840Lm
- Efficiency _____ 70Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

- White

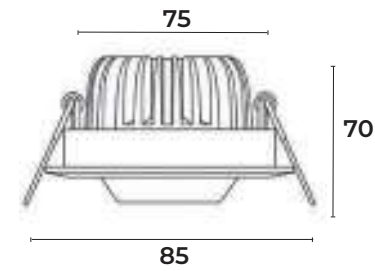

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



POOKIE



POOKIE 15W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500k Tunable
- CRI _____ >90
- Lens _____ 36° / 24°/15°
- Luminous Flux _____ 1200 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- Matte Pink

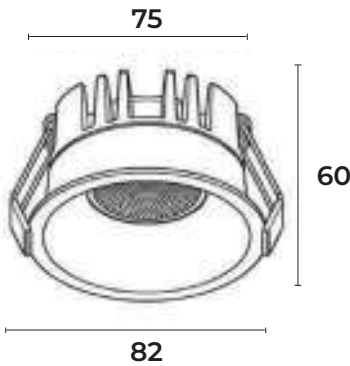

DIMMING & TUNING TECHNOLOGY

- RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



UNNI 15W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500k Tunable
- CRI _____ >90
- Lens _____ 36° / 24°/15°
- Luminous Flux _____ 1200 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- Matte Sky Blue

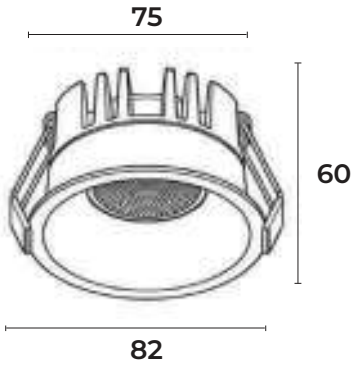

DIMMING & TUNING TECHNOLOGY

- RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



REN 15W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500k Tunable
- CRI _____ >90
- Lens _____ 36° / 24°/15°
- Luminous Flux _____ 1200 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- Matte Green

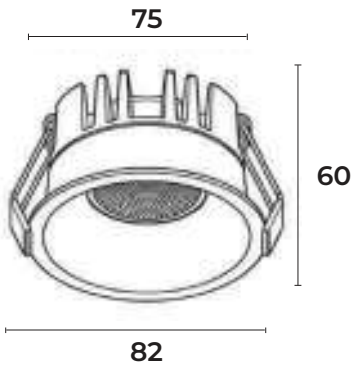

DIMMING & TUNING TECHNOLOGY

-  RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

TITAN



TITAN 15W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500k Tunable
- CRI _____ >90
- Lens _____ 36° / 24°/15°
- Luminous Flux _____ 1200 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- Matte SS Grey

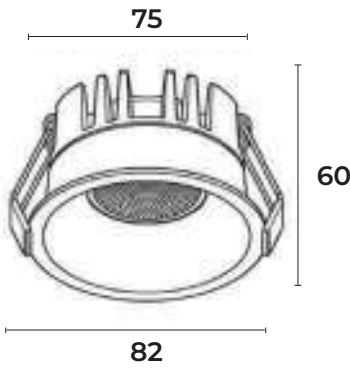

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



FEATURES



50,000
BURNING HOURS




HIGH CRI >90



HIGH LUMENS



2 YEARS
WARRANTY*



ANTI GLARE



ECO FRIENDLY



FLAWLESS
COLOR, FINISHING & FEEL



ENERGY SAVING
UP TO 80%




UNIVERSAL
APPLICATION



2700K & 5000K LED
AVAILABLE ON REQUEST



FLICKER FREE



FULHAM & OSRAM DRIVERS
AVAILABLE ON REQUEST

GATEWAY




GATEWAY SIGMESH + ZIGBEE

A gateway with built-in Sigmesh and Zigbee technology acts as a central hub for connecting and managing smart devices within a network.

It enables seamless communication between different wireless protocols, ensuring reliable and efficient data transfer. With Sigmesh support, the system offers strong mesh networking capabilities for extended coverage and stability.

Zigbee integration allows low-power, secure connectivity for IoT devices like sensors and smart home equipment. This combination enhances scalability

TECHNICAL SPECIFICATIONS	
Model	Gateway Sigmesh + Zigbee
Voltage	DC 5V 1A/2A
Input Power	≤2W
Working	10°C - 50°C
Humidity	0-92%RH
Protocol Support	Zigbee + Sigmesh
No. of Devices	Zigbee 50pcs Sigmesh 70pcs





SMART REMOTE ONE

Control your lighting effortlessly with a remote featuring 12 groups and 4 customizable scenes for flexible, multi-zone management.

The intuitive design lets you switch, dim, and adjust settings with precision across different areas. A built-in lock function prevents accidental changes, ensuring consistent lighting performance.

Perfect for smart LED systems requiring reliable and convenient remote operation.

TECHNICAL SPECIFICATIONS

Model _____ Smart Remote One

Battery _____ AAA x 2

Input Voltage _____ DC3V

Control range _____ $\geq 15-30\text{m}$

LDO On _____ 5-10 mA

Protocol _____ RF 2.4G Hz





KEYPAD (ZIGBEE/SIGMESH)

The keypad controller offers 4 customizable lighting scenes with smooth CCT and dimming control.

Its sleek, timeless design and premium finish deliver a refined, luxury feel for modern spaces.

TECHNICAL SPECIFICATIONS

- Model _____ Keypad
- Finish _____ Graphite Black
- Material _____ Aluminium
- Protocol _____ Zigbee | Sigmesh
- Functions _____ 4 Scene + CCT & Dimming
- Battery
Sigmesh Keypad _____ 2032 x 1
- Zigbee Keypad _____ AC Current





SMARTCONTROL LUXE EDGE

The smart lighting controller knob delivers precise, intuitive control with seamless dimming and smart home integration.

Its sleek design and responsive performance make it the best choice for modern lighting.



TECHNICAL SPECIFICATIONS

- Model _____ Smartcontrol Luxe Edge
- Finish _____ Matte Black
- Battery Size _____ AAA x 2
- Material _____ Aluminium
- Protocol _____ Zigbee | Sigmesh





SMARTCONTROL LUXE PRO

Luxe Pro Gold is a premium smart lighting controller crafted in a luxurious matte gold finish, designed to elevate modern interiors.

It seamlessly blends cutting-edge smart control with elegant aesthetics, offering effortless lighting customization at your fingertips.

TECHNICAL SPECIFICATIONS

- Model _____ Smartcontrol Luxe PRO
- Finish _____ Matte Gold
- Battery Size _____ AAA x 2
- Material _____ Aluminium
- Protocol _____ Zigbee | Sigmesh





INTELLIGENT TOUCH PANEL 8INCH

TECHNICAL SPECIFICATIONS

Model Input	100-240V~, 50/60Hz
Working temp	0-40°C
Working hum	5%-90%RH (non-condensing)
Storage	2GB RAM/16GB ROM
Screen	A8-inch 1280 x 800
Audio	Speaker x 2/Microphone x 2
Wireless Protocol	Zigbee Sigmesh
System	Android 11
Operation Mode	Touch control Physical button Voice control APP control

The 8-inch intelligent Android touchscreen panel offers seamless control of smart lighting and home automation systems through an intuitive, user-friendly interface.

It supports real-time monitoring, customizable scenes, and integration with multiple smart devices, making it a powerful and efficient solution for modern automated environments.



127.5

233.5

LEPUS



PULL OUT + TILT

LEPUS 7W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 24°
- Luminous Flux _____ 504 Lm
- Efficiency _____ 72 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

- White | Black
-



DIMMING & TUNING TECHNOLOGY

- DALI 2
- RF 2.4G + BLE
- TRIAC/PHASE CUT
- ZIGBEE

STELLAR



TILTABLE

STELLAR 14W (7 x 2)

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 24°

Luminous Flux _____ 980 Lm

Efficiency _____ 70 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

RIO



PULL OUT + ROTATE

RIO 5W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24°
- Luminous Flux _____ 350 Lm
- Efficiency _____ 70 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	120mA
Dimmable	TRIAC	36V	120mA
Smart	Sigmesh (Bluetooth Based)	36V	120mA
	Zigbee (Wifi Based)	36V	120mA
Dali	Dt 6	36V	120mA
	Dt 8	36V	120mA

Finish

- White | Black
-



DIMMING & TUNING TECHNOLOGY

-
- RF 2.4G + BLE
- TRIAC/PHASE CUT
- ZIGBEE



PULL OUT + ROTATE

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source	Ledvance Cree Pro Tyanshine
CCT	3000K 4000K 6000K 2700K - 6500K Tunable
CRI	>90
Lens	36° / 24°
Luminous Flux	700 Lm
Efficiency	70 Lm/W
Material	Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	120mA x 2
Dimmable	TRIAC	36V	120mA x 2
Smart	Sigmesh (Bluetooth Based)	36V	120mA x 2
	Zigbee (Wifi Based)	36V	120mA x 2
Dali	Dt 6	36V	120mA x 2
	Dt 8	36V	120mA x 2

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

White | Black



RIO

RIO 15W



PULL OUT + ROTATE

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source	Ledvance Cree Pro Tyanshine
CCT	3000K 4000K 6000K 2700K - 6500K Tunable
CRI	>90
Lens	36° / 24°
Luminous Flux	1050 Lm
Efficiency	70 Lm/W
Material	Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	120mA x 3
Dimmable	TRIAC	36V	120mA x 3
Smart	Sigmesh (Bluetooth Based)	36V	120mA x 3
	Zigbee (Wifi Based)	36V	120mA x 3
Dali	Dt 6	36V	120mA x 3
	Dt 8	36V	120mA x 3

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

White | Black



MEMO



PULL OUT + ROTATE

MEMO 7W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24°

Luminous Flux _____ 511 Lm

Efficiency _____ 73 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

MEMO



PULL OUT + ROTATE

MEMO 14W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24°

Luminous Flux _____ 1022 Lm

Efficiency _____ 73 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA x 2
Dimmable	TRIAC	36V	150mA x 2
Smart	Sigmesh (Bluetooth Based)	36V	150mA x 2
	Zigbee (Wifi Based)	36V	150mA x 2
Dali	Dt 6	36V	150mA x 2
	Dt 8	36V	150mA x 2

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



PULL OUT + ROTATE

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36°
- Luminous Flux _____ 510 Lm
- Efficiency _____ 73 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

- White



DIMMING & TUNING TECHNOLOGY

-  RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



VINTAGE



VINTAGE 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 50°

Luminous Flux _____ 800 Lm

Efficiency _____ 67 Lm/W


Material _____ Aluminium Die-Cast & PLEXIGLASS

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	280mA
Smart	Sigmesh (Bluetooth Based)	36V	280mA
	Zigbee (Wifi Based)	36V	280mA
Dali	Dt 6	36V	280mA
	Dt 8	36V	280mA

Finish

Antique | Rose Gold



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

VINTAGE

VINTAGE 15W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source	Ledvance Cree Pro Tyanshine
CCT	3000K 4000K 6000K 2700K - 6500K Tunable
CRI	>90
Lens	50°
Luminous Flux	1000 Lm
Efficiency	80 Lm/W
Material	Aluminium Die-Cast & PLEXIGLASS

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

Antique | Rose Gold





APPLICATION

IP Rating
IP44

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 50°

Luminous Flux _____ 850 Lm

Efficiency _____ 85 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



BOLD



BOLD 12W

APPLICATION

- IP Rating
- IP65
- Recommended Use
- Indoor Use
- Outdoor Use
- Installation
- Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source
- Ledvance | Cree Pro | Tyanshine
- CCT
- 3000K | 4000K | 6000K
- CRI
- >90
- Lens
- 60°
- Luminous Flux
- 960 Lm
- Efficiency
- 80 Lm/W
- Material
- Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	280mA
Smart	Sigmesh (Bluetooth Based)	36V	280mA
	Zigbee (Wifi Based)	36V	280mA
Dali	Dt 6	36V	280mA

Finish

- White | Black
- ☐
- ☒

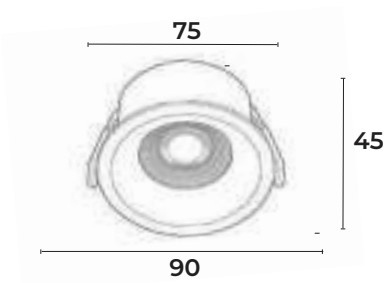

DIMMING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



BOLD 18W

APPLICATION

IP Rating
IP65

Recommended Use
Indoor Use
Outdoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K

CRI _____ >90

Lens _____ 60°

Luminous Flux _____ 1440 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	450mA
Dimmable	TRIAC	36V	450mA
Smart	Sigmesh (Bluetooth Based)	36V	450mA
	Zigbee (Wifi Based)	36V	450mA
Dali	Dt 6	36V	450mA

Finish

White | Black

○ ●

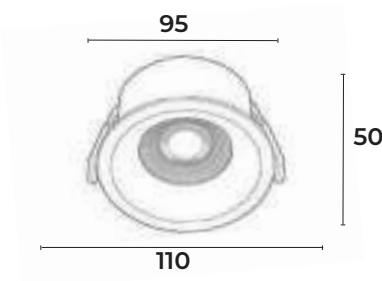

DIMMING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

SOL



SOL 10W

APPLICATION

IP Rating
IP65

Recommended Use
Indoor Use
Outdoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

ÇCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 24°

Luminous Flux _____ 750 Lm

Efficiency _____ 75 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

SOL



SOL 15W

APPLICATION

- IP Rating
IP65
- Recommended Use
Indoor Use
Outdoor Use
- Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 24°
- Luminous Flux _____ 1125 Lm
- Efficiency _____ 75 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

- White | Black
-



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



KYRO 7W

APPLICATION

IP Rating
IP65

Recommended Use
Indoor Use
Outdoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 560 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA
	Dt 8	36V	150mA

Finish

Black

●

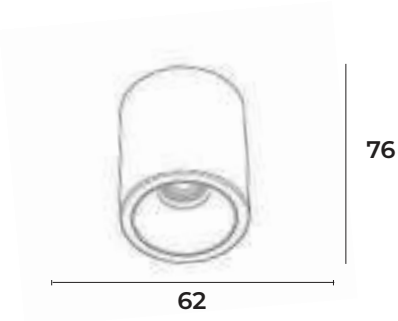

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



KYRO 12W

APPLICATION

IP Rating
IP65

Recommended Use
Indoor Use
Outdoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

Black

●

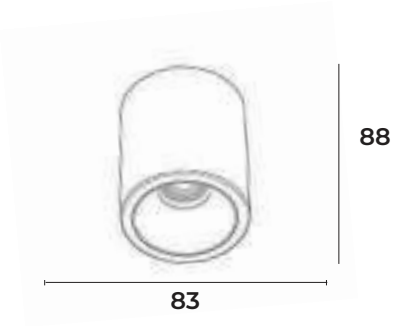

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

BYNO



PULL OUT + ROTATE

BYNO 10W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24°

Luminous Flux _____ 700 Lm

Efficiency _____ 70 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

		Driver	Voltage	Current
Single Colour			36V	250mA
Dimmable	TRIAC		36V	250mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

FUJI

FUJI 15W



ROTATABLE

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS


LED Light Source	Ledvance Cree Pro Tyanshine
CCT	3000K 4000K 6000K 2700K - 6500K Tunable
CRI	>90
Lens	36° / 24°
Luminous Flux	1125 Lm
Efficiency	75 Lm/W
Material	Aluminium Die-Cast

DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		36V	350mA
Dimmable	TRIAC	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

White | Black

GLOBE



GLOBE 10W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 750 Lm

Efficiency _____ 75 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

White + Gun Black

Black + Gun Black



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

GLOBE



GLOBE 15W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 1125Lm

Efficiency _____ 75Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

Finish

White + Gun Black

Black + Gun Black



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

COMET



ROTATABLE

COMET 9W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 24°

Luminous Flux _____ 720 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast

DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		36V	200mA
Dimmable	TRIAC	36V	200mA
Smart	Sigmesh (Bluetooth Based)	36V	200mA
	Zigbee (Wifi Based)	36V	200mA
Dali	Dt 6	36V	200mA
	Dt 8	36V	200mA

Finish

White

○



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

TENO



TENO 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White | Black | Gold | Silver



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

LIOR



LIOR 5W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 500 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		40V	120mA
Dimmable	TRIAC	40V	120mA
Smart	Sigmesh (Bluetooth Based)	40V	120mA
	Zigbee (Wifi Based)	40V	120mA
Dali	Dt 6	40V	120mA
	Dt 8	40V	120mA

Finish

White + Gun Black

Black + Gun Black

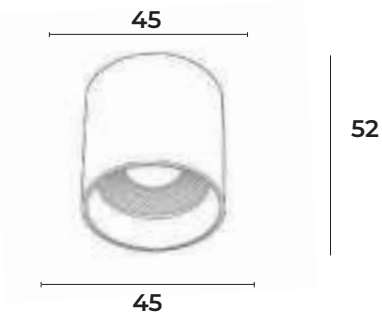

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



LIOR 10W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Surface Mounted

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36°
- Luminous Flux _____ 800 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium

DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		40V	250mA
Dimmable	TRIAC	40V	250mA
Smart	Sigmesh (Bluetooth Based)	40V	250mA
	Zigbee (Wifi Based)	40V	250mA
Dali	Dt 6	40V	250mA
	Dt 8	40V	250mA

Finish

- White + Gun Black
- Black + Gun Black

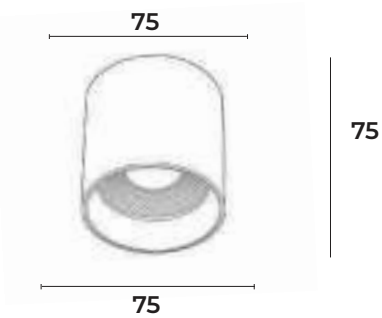

DIMMING & TUNING TECHNOLOGY

- DALI 2
- RF 2.4G + BLE
- TRIAC/PHASE CUT
- ZIGBEE



LIOR 15W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Surface Mounted

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36°
- Luminous Flux _____ 1200 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium

DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		40V	350mA
Dimmable	TRIAC	40V	350mA
Smart	Sigmesh (Bluetooth Based)	40V	350mA
	Zigbee (Wifi Based)	40V	350mA
Dali	Dt 6	40V	350mA
	Dt 8	40V	350mA

Finish

- White + Gun Black
- Black + Gun Black

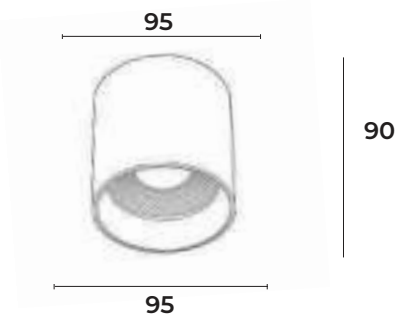

DIMMING & TUNING TECHNOLOGY

- DALI 2
- RF 2.4G + BLE
- TRIAC/PHASE CUT
- ZIGBEE

ONYX



ROTATABLE

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36° / 24° / 15°

Luminous Flux _____ 630 Lm

Efficiency _____ 90 Lm/W


Material _____ Aluminium Die-Cast

DRIVE SYSTEM

		Driver	Voltage	Current
Single Colour			36V	200mA
Dimmable		TRIAC	36V	200mA
Smart	Sigmesh (Bluetooth Based)		36V	200mA
	Zigbee (Wifi Based)		36V	200mA
Dali	Dt 6		36V	200mA
	Dt 8		36V	200mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

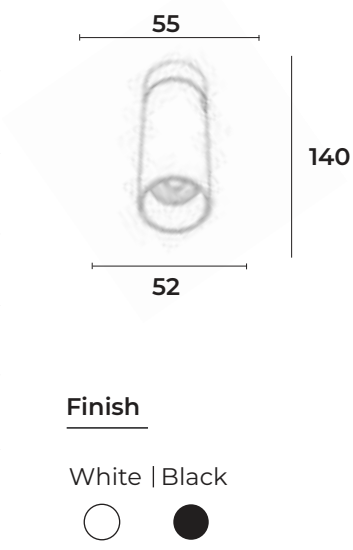

Finish

White | Black

ONYX CONCEAL



ONYX CONCEAL 8W



ROTATABLE

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting


TECHNICAL SPECIFICATIONS

- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36° / 24° / 15°
- Luminous Flux _____ 480 Lm
- Efficiency _____ 80 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

		Driver	Voltage	Current
Single Colour			36V	200mA
Dimmable		TRIAC	36V	200mA
Smart	Sigmesh (Bluetooth Based)		36V	200mA
	Zigbee (Wifi Based)		36V	200mA
Dali	Dt 6		36V	200mA
	Dt 8		36V	200mA

DIMMING & TUNING TECHNOLOGY
DALI 2 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish
White | Black



FEATURES



50,000
BURNING HOURS




HIGH CRI >90



HIGH LUMENS



2 YEARS
WARRANTY*



ANTI GLARE



ECO FRIENDLY



FLAWLESS
COLOR, FINISHING & FEEL



ENERGY SAVING
UP TO 80%




UNIVERSAL
APPLICATION



2700K & 5000K LED
AVAILABLE ON REQUEST



FLICKER FREE



FULHAM & OSRAM DRIVERS
AVAILABLE ON REQUEST

OLID



OLID 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ Bridgelux

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ Diffuser

Luminous Flux _____ 1080 Lm

Efficiency _____ 90 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

OLID



OLID 18W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ Bridgelux

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 26°

Luminous Flux _____ 1620 Lm

Efficiency _____ 90 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		60V	300mA
Smart	Sigmesh (Bluetooth Based)	60V	300mA

Finish

White | Black

○ ●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

SURFACE ART



SURFACE ART 8W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K | 4000K

CRI _____ >90

Lens _____ 20° - 35°

Luminous Flux _____ 640 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	200mA
Smart	Sigmesh (Bluetooth Based)	36V	200mA
	Zigbee (Wifi Based)	36V	200mA
Dali	Dt 6	36V	200mA

Finish

Black

●

RECESSED ART



RECESSED ART 8W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K | 4000K

CRI _____ >90

Lens _____ 20° - 35°

Luminous Flux _____ 640 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	200mA
Smart	Sigmesh (Bluetooth Based)	36V	200mA
	Zigbee (Wifi Based)	36V	200mA
Dali	Dt 6	36V	200mA

Finish

Black

●

CLASSIC



CLASSIC 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ 36°

Luminous Flux _____ 960 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White + Black

○ ●

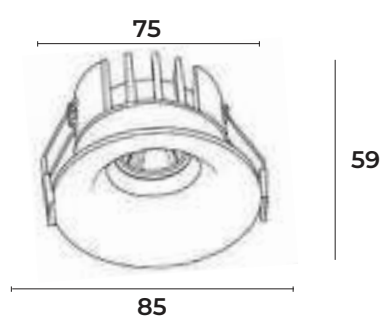

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Ledvance | Cree Pro | Tyanshine
- CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ 36°
- Luminous Flux _____ 1920Lm
- Efficiency _____ 80Lm/W
- Material _____ Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA x 2
Dimmable	TRIAC	36V	300mA x 2
Smart	Sigmesh (Bluetooth Based)	36V	300mA x 2
	Zigbee (Wifi Based)	36V	300mA x 2
Dali	Dt 6	36V	300mA x 2
	Dt 8	36V	300mA x 2

Finish

- White + Black
- ☐ ☒

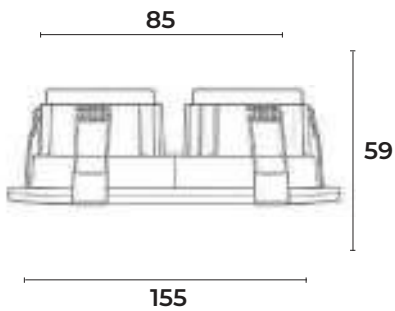

DIMMING & TUNING TECHNOLOGY

- RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

META SQ



META SQ 30W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source _____ Ledvance | Cree Pro | Tyanshine
CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
CRI _____ >90
Lens _____ 36° / 24° / 15°
Luminous Flux _____ 2400 Lm
Efficiency _____ 80 Lm/W
Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA x2
Dimmable	TRIAC	36V	350mA x2
Smart	Sigmesh (Bluetooth Based)	36V	350mA x2
	Zigbee (Wifi Based)	36V	350mA x2
Dali	Dt 6	36V	350mA x2
	Dt 8	36V	350mA x2

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish
White | Black
 

META SQ



META SQ 15W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source _____ Ledvance | Cree Pro | Tyanshine
CCT _____ 3000K | 4000K | 6000K | 2700K - 6500K Tunable
CRI _____ >90
Lens _____ 36° / 24° / 15°
Luminous Flux _____ 1200 Lm
Efficiency _____ 90 Lm/W
Material _____ Aluminium Die-Cast

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	350mA
Dimmable	TRIAC	36V	350mA
Smart	Sigmesh (Bluetooth Based)	36V	350mA
	Zigbee (Wifi Based)	36V	350mA
Dali	Dt 6	36V	350mA
	Dt 8	36V	350mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



Finish

White | Black
 



CINDER 3L



CINDER 3L 6W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use


Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source	BRIDGELUX
CCT	3000K 4000K 6000k 2700K - 6500K Tunable
CRI	>90
Lens	24°
Luminous Flux	420 Lm
Efficiency	70 Lm/W
Material	Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA



Finish

- White + Black
- Black + Black

DIMMING & TUNING TECHNOLOGY

RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

CINDER 6L



CINDER 6L 12W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source	BRIDGELUX
CCT	3000K 4000K 6000k 2700K - 6500K Tunable
CRI	>90
Lens	24°
Luminous Flux	840 Lm
Efficiency	70 Lm/W
Material	Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE




Finish

White + Black

Black + Black

CINDER 12L

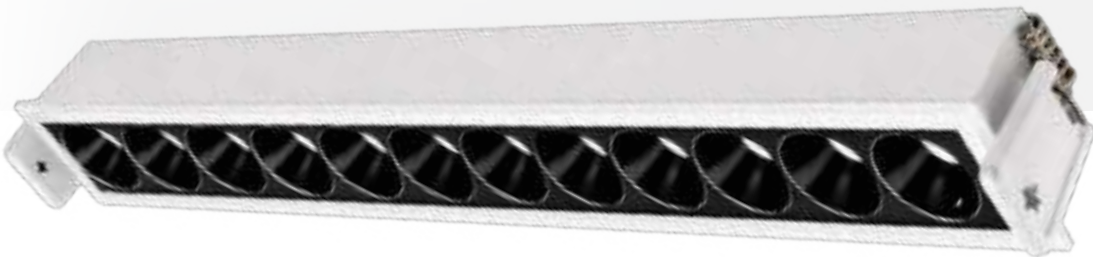

CINDER 12L 20W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source	BRIDGELUX
CCT	3000K 4000K 6000k 2700K - 6500K Tunable
CRI	>90
Lens	24°
Luminous Flux	1680 Lm
Efficiency	70 Lm/W
Material	Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	500mA
Dimmable	TRIAC	36V	500mA
Smart	Sigmesh (Bluetooth Based)	36V	500mA
	Zigbee (Wifi Based)	36V	500mA
Dali	Dt 6	36V	500mA
	Dt 8	36V	500mA

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

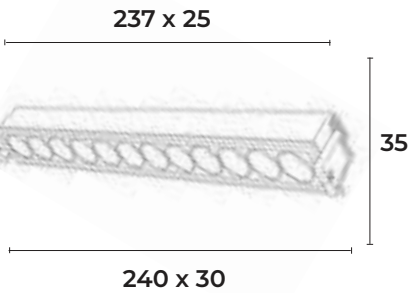

Finish

White + Black

Black + Black

RAZE 6L



RAZE 6L 6W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use


Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source	BRIDGELUX
CCT	3000K 4000K
CRI	>90
Lens	24°
Luminous Flux	420 Lm
Efficiency	70 Lm/W
Material	Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA

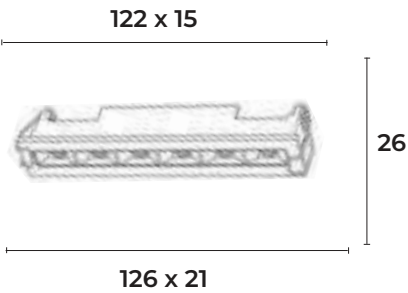

Finish



RAZE 12L

RAZE 12L 12W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use


Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source	BRIDGELUX
CCT	3000K 4000K
CRI	>90
Lens	24°
Luminous Flux	840 Lm
Efficiency	70 Lm/W
Material	Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA

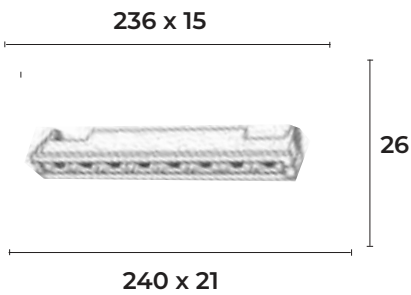

Finish



MOVE 6L

MOVE 6L 6W



TILTABLE

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use


Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source	BRIDGELUX
CCT	3000K 4000K
CRI	>90
Lens	24°
Luminous Flux	420 Lm
Efficiency	70 Lm/W
Material	Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA

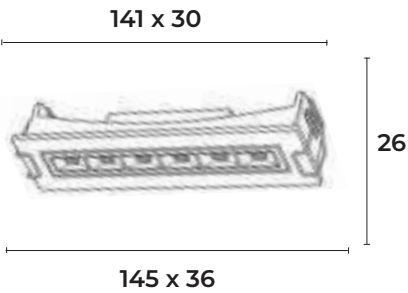

Finish

White + Black



Black + Black



MOVE 12L



MOVE 12L 12W



TILTABLE

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use


Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source	BRIDGELUX
CCT	3000K 4000K
CRI	>90
Lens	24°
Luminous Flux	840 Lm
Efficiency	70 Lm/W
Material	Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	280mA
Dimmable	TRIAC	36V	280mA
Smart	Sigmesh (Bluetooth Based)	36V	280mA
	Zigbee (Wifi Based)	36V	280mA
Dali	Dt 6	36V	280mA

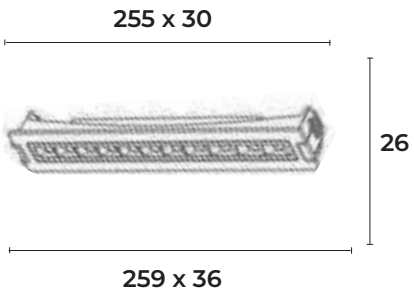

Finish

White + Black

Black + Black

CLOVER 3L TL



CLOVER 3L 6W TL


APPLICATION	TECHNICAL SPECIFICATIONS
IP Rating IP20	LED Light Source _____ BRIDGELUX
Recommended Use Indoor Use	CCT _____ 3000K 4000 K
Installation Recessed Ceiling Mounting	CRI _____ >90
	Lens _____ 30°
	Luminous Flux _____ 420 Lm
	Efficiency _____ 70 Lm/W
	Material _____ Aluminium

DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	150mA
Dimmable	TRIAC	36V	150mA
Smart	Sigmesh (Bluetooth Based)	36V	150mA
	Zigbee (Wifi Based)	36V	150mA
Dali	Dt 6	36V	150mA

Finish

White

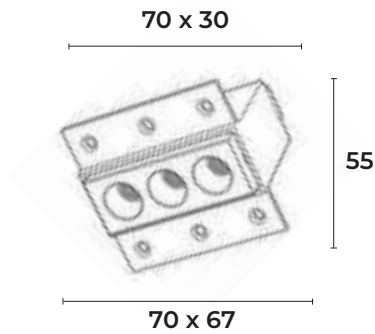

CLOVER 6L TL



CLOVER 6L 12W TL

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K | 4000K

CRI _____ >90

Lens _____ 30°

Luminous Flux _____ 840 Lm

Efficiency _____ 70 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA

Finish

White

○

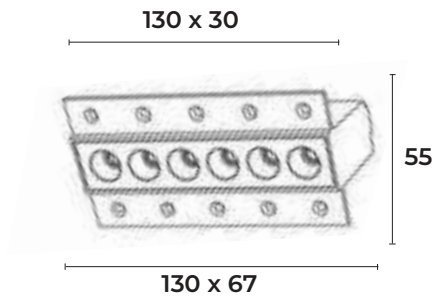

CLOVER 12L TL



CLOVER 12L 20W TL

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K | 4000K

CRI _____ >90

Lens _____ 30°

Luminous Flux _____ 1680 Lm

Efficiency _____ 70 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	500mA
Dimmable	TRIAC	36V	500mA
Smart	Sigmesh (Bluetooth Based)	36V	500mA
	Zigbee (Wifi Based)	36V	500mA
Dali	Dt 6	36V	500mA

Finish

White

○

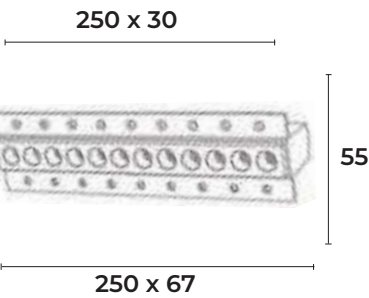



Lighting is a jewelry of architecture

VENUS



VENUS 8W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Surface Mounted

TECHNICAL SPECIFICATIONS

LED Light Source	BRIDGELUX
CCT	3000K 4000K
CRI	>90
Lens	38°
Luminous Flux	600 Lm
Efficiency	75 Lm/W
Material	Aluminium

DRIVE SYSTEM


Driver	Voltage	Current
Single Colour	36V	200mA

Finish

White + Black



Black + Black





APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Bridgelux

CCT _____ 3000K | 4000K

CRI _____ >90

Lens _____ 24°

Luminous Flux _____ 60 Lm

Efficiency _____ 60 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	10V	300mA

Finish

White | Black

☐ ☒



BRIO



TILTABLE

BRIO 3W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ Bridgelux
- CCT _____ 3000K | 4000K | 6000K
- CRI _____ >90
- Lens _____ 36°
- Luminous Flux _____ 210 Lm
- Efficiency _____ 70 Lm/W
- Material _____ Aluminium Die-Cast

DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	10V	300mA

Finish

- White | Black
- ☐ ☒



ICON



ICON 3W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS

- LED Light Source _____ BRIDGELUX
- CCT _____ 3000K | 4000K | 6000K
- CRI _____ >90
- Beam Angle _____ 45°
- Luminous Flux _____ 210 Lm
- Efficiency _____ 70 Lm/W
- Material _____ Aluminium


DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	6-12V	300mA

Finish

White

○

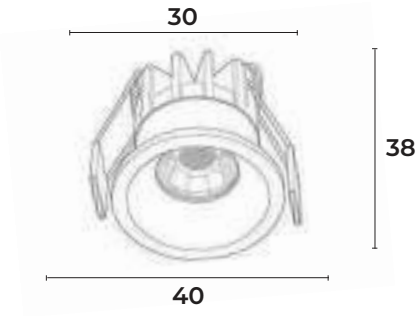

INTI



INTI 3W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ BRIDGELUX
- CCT _____ 3000K | 4000K
- CRI _____ >90
- Beam Angle _____ 45°
- Luminous Flux _____ 210 Lm
- Efficiency _____ 70 Lm/W
- Material _____ Aluminium

DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	10V	300mA

Finish

White + Black

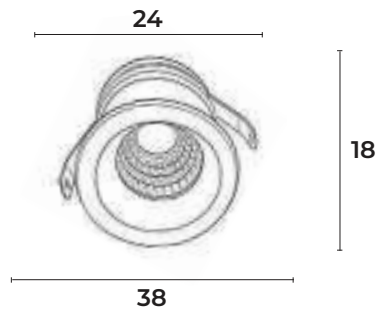

ZON



ZON 3W

APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ BRIDGELUX
- CCT _____ 3000K | 4000K
- CRI _____ >90
- Beam Angle _____ 45°
- Luminous Flux _____ 210 Lm
- Efficiency _____ 70 Lm/W
- Material _____ Aluminium

DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	10V	300mA

Finish

- White + Black
- ☐ ☒

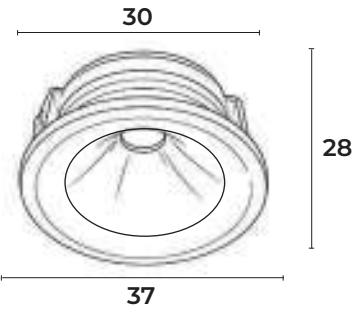

RAY 20



RAY 20 3W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


LED Light Source	BRIDGELUX
CCT	3000K 4000K
CRI	>90
Lens	24°
Luminous Flux	165 Lm
Efficiency	55 Lm/W
Material	Aluminium Die-Cast

DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	3V	700mA

Finish

White | Black



RAY 25



RAY 25 3W



APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source BRIDGELUX

CCT 3000K | 4000K

CRI >90

Lens 24°

Luminous Flux 180 Lm

Efficiency 60 Lm/W

Material Aluminium Die-Cast


DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	3V	700mA

Finish

White | Black

☐ ☒





Light for every walk of life



APPLICATION

- IP Rating
IP20
- Recommended Use
Indoor Use
Outdoor Use
- Installation
Recessed Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ BRIDGELUX
- CCT _____ 3000K
- CRI _____ >90
- Lens _____ 26°
- Luminous Flux _____ 180 Lm
- Efficiency _____ 60 Lm/W
- Material _____ Aluminium

DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	3V	700mA

Finish

- White

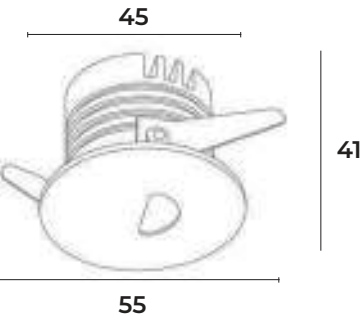



APPLICATION

IP Rating
IP65

Recommended Use
Indoor Use
Outdoor Use

Installation
Recessed Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K

CRI _____ >90

Lens _____ 26°

Luminous Flux _____ 180 Lm

Efficiency _____ 60 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	3V	700mA

Finish

White

○

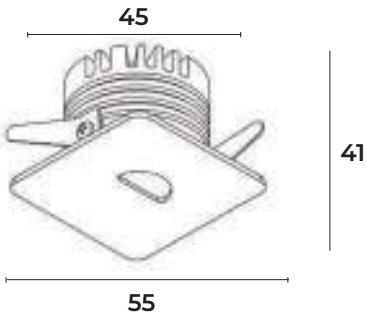



NIO 3W

APPLICATION

- IP Rating
IP65
- Recommended Use
Indoor Use
Outdoor Use
- Installation
Recessed Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ BRIDGELUX
- CCT _____ 3000K
- CRI _____ >90
- Lens _____ 26°
- Luminous Flux _____ 180 Lm
- Efficiency _____ 60 Lm/W
- Material _____ Aluminium

DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	3V	700mA

Finish

White
○

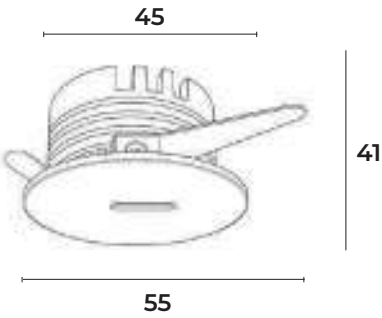



APPLICATION

- IP Rating
IP65
- Recommended Use
Indoor Use
Outdoor Use
- Installation
Recessed Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ BRIDGELUX
- CCT _____ 3000K
- CRI _____ >90
- Lens _____ 26°
- Luminous Flux _____ 180 Lm
- Efficiency _____ 60 Lm/W
- Material _____ Aluminium

DRIVE SYSTEM

Driver	Voltage	Current
Single Colour	36V	700mA

Finish

- White

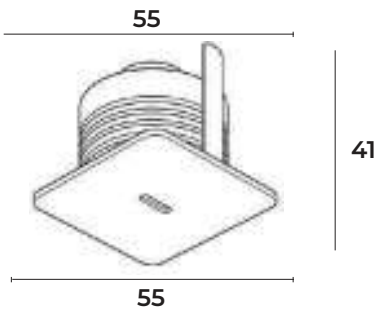CLOUD



CLOUD 12W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ Diffuser

Luminous Flux _____ 1080 Lm

Efficiency _____ 90 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White

○

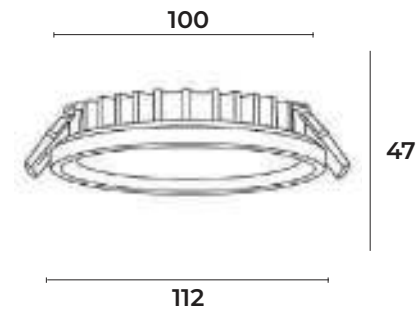

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

CLOUD



CLOUD 18W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ Diffuser

Luminous Flux _____ 1620 Lm

Efficiency _____ 90 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		60V	300mA
Dimmable	TRIAC	60V	300mA
Smart	Sigmesh (Bluetooth Based)	60V	300mA
	Zigbee (Wifi Based)	60V	300mA
Dali	Dt 6	60V	300mA
	Dt 8	60V	300mA

Finish

White

○

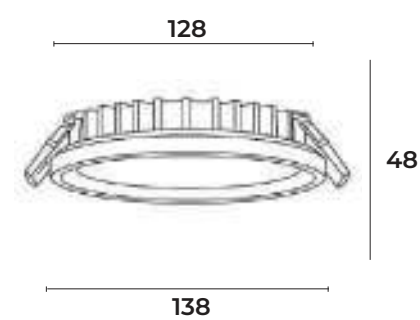

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

CLOUD



CLOUD 24W

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ Diffuser

Luminous Flux _____ 2160 Lm

Efficiency _____ 90 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		36V	600mA
Dimmable	TRIAC	36V	600mA
Smart	Sigmesh (Bluetooth Based)	36V	600mA
	Zigbee (Wifi Based)	36V	600mA
Dali	Dt 6	36V	600mA
	Dt 8	36V	600mA

Finish

White

○

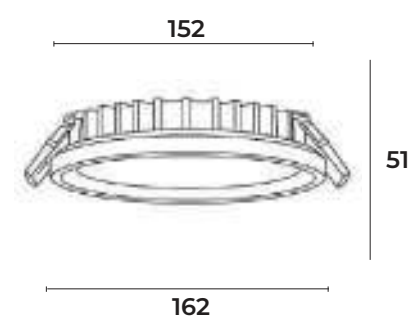

DIMMING & TUNING TECHNOLOGY

 RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



ZEN 12W

APPLICATION

IP Rating
Ip20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ Diffuset

Luminous Flux _____ 420 Lm

Efficiency _____ 70 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		36V	300mA
Dimmable	TRIAC	36V	300mA
Smart	Sigmesh (Bluetooth Based)	36V	300mA
	Zigbee (Wifi Based)	36V	300mA
Dali	Dt 6	36V	300mA
	Dt 8	36V	300mA

Finish

White

○

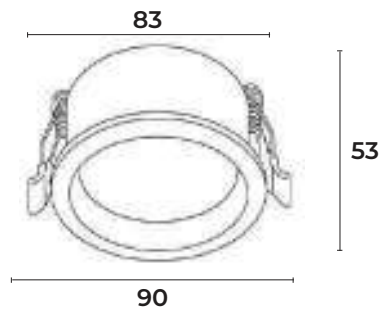

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE

ZEN



ZEN 18W

APPLICATION

IP Rating
Ip20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ BRIDGELUX

CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable

CRI _____ >90

Lens _____ Diffuser

Luminous Flux _____ 1620 Lm

Efficiency _____ 90 Lm/W

Material _____ Aluminium


DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		60V	300mA
Dimmable	TRIAC	60V	300mA
Smart	Sigmesh (Bluetooth Based)	60V	300mA
	Zigbee (Wifi Based)	60V	300mA
Dali	Dt 6	60V	300mA
	Dt 8	60V	300mA

Finish

White

○

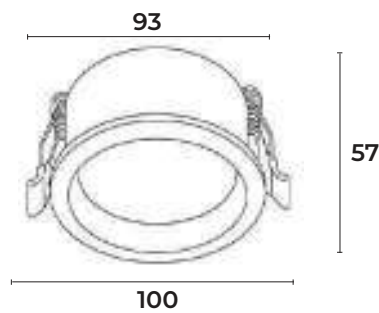

DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



ZEN 24W

APPLICATION

- IP Rating
Ip20
- Recommended Use
Indoor Use
- Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS


- LED Light Source _____ BRIDGELUX
- CCT _____ 3000K | 4000K | 6000k | 2700K - 6500K Tunable
- CRI _____ >90
- Lens _____ Diffuser
- Luminous Flux _____ 2160 Lm
- Efficiency _____ 90 Lm/W
- Material _____ Aluminium

DRIVE SYSTEM

Driver		Voltage	Current
Single Colour		40V	600mA
Dimmable	TRIAC	40V	600mA
Smart	Sigmesh (Bluetooth Based)	40V	600mA
	Zigbee (Wifi Based)	40V	600mA
Dali	Dt 6	40V	600mA
	Dt 8	40V	600mA

Finish

- White
- ☐

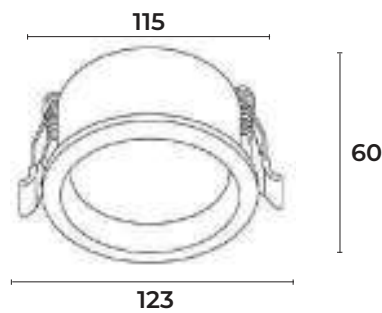

DIMMING & TUNING TECHNOLOGY



- RF 2.4G + BLE
- TRIAC/PHASE CUT
- ZIGBEE



LEX 10W (MODULE LAMP)

APPLICATION

IP Rating
IP20

Recommended Use
Indoor Use

Installation
Recessed Ceiling
Mounting

TECHNICAL SPECIFICATIONS

LED Light Source _____ Ledvance | Cree Pro | Tyanshine

CCT _____ 3000K | 4000K | 6000K | 2700K to 6500K Tunable

CRI _____ >90

Lens _____ Reflector

Luminous Flux _____ 800 Lm

Efficiency _____ 80 Lm/W

Material _____ Aluminium Die-Cast


DRIVE SYSTEM

	Driver	Voltage	Current
Single Colour	Eaglerise	36V	250mA
Dimmable	TRIAC	36V	250mA
Smart	Sigmesh (Bluetooth Based)	36V	250mA
	Zigbee (Wifi Based)	36V	250mA
Dali	Dt 6	36V	250mA
	Dt 8	36V	250mA

Finish

Black

●



DIMMING & TUNING TECHNOLOGY



RF 2.4G + BLE TRIAC/PHASE CUT ZIGBEE



LIGHTING • AUTOMATION • ARCHITECTURE • INTERIORS